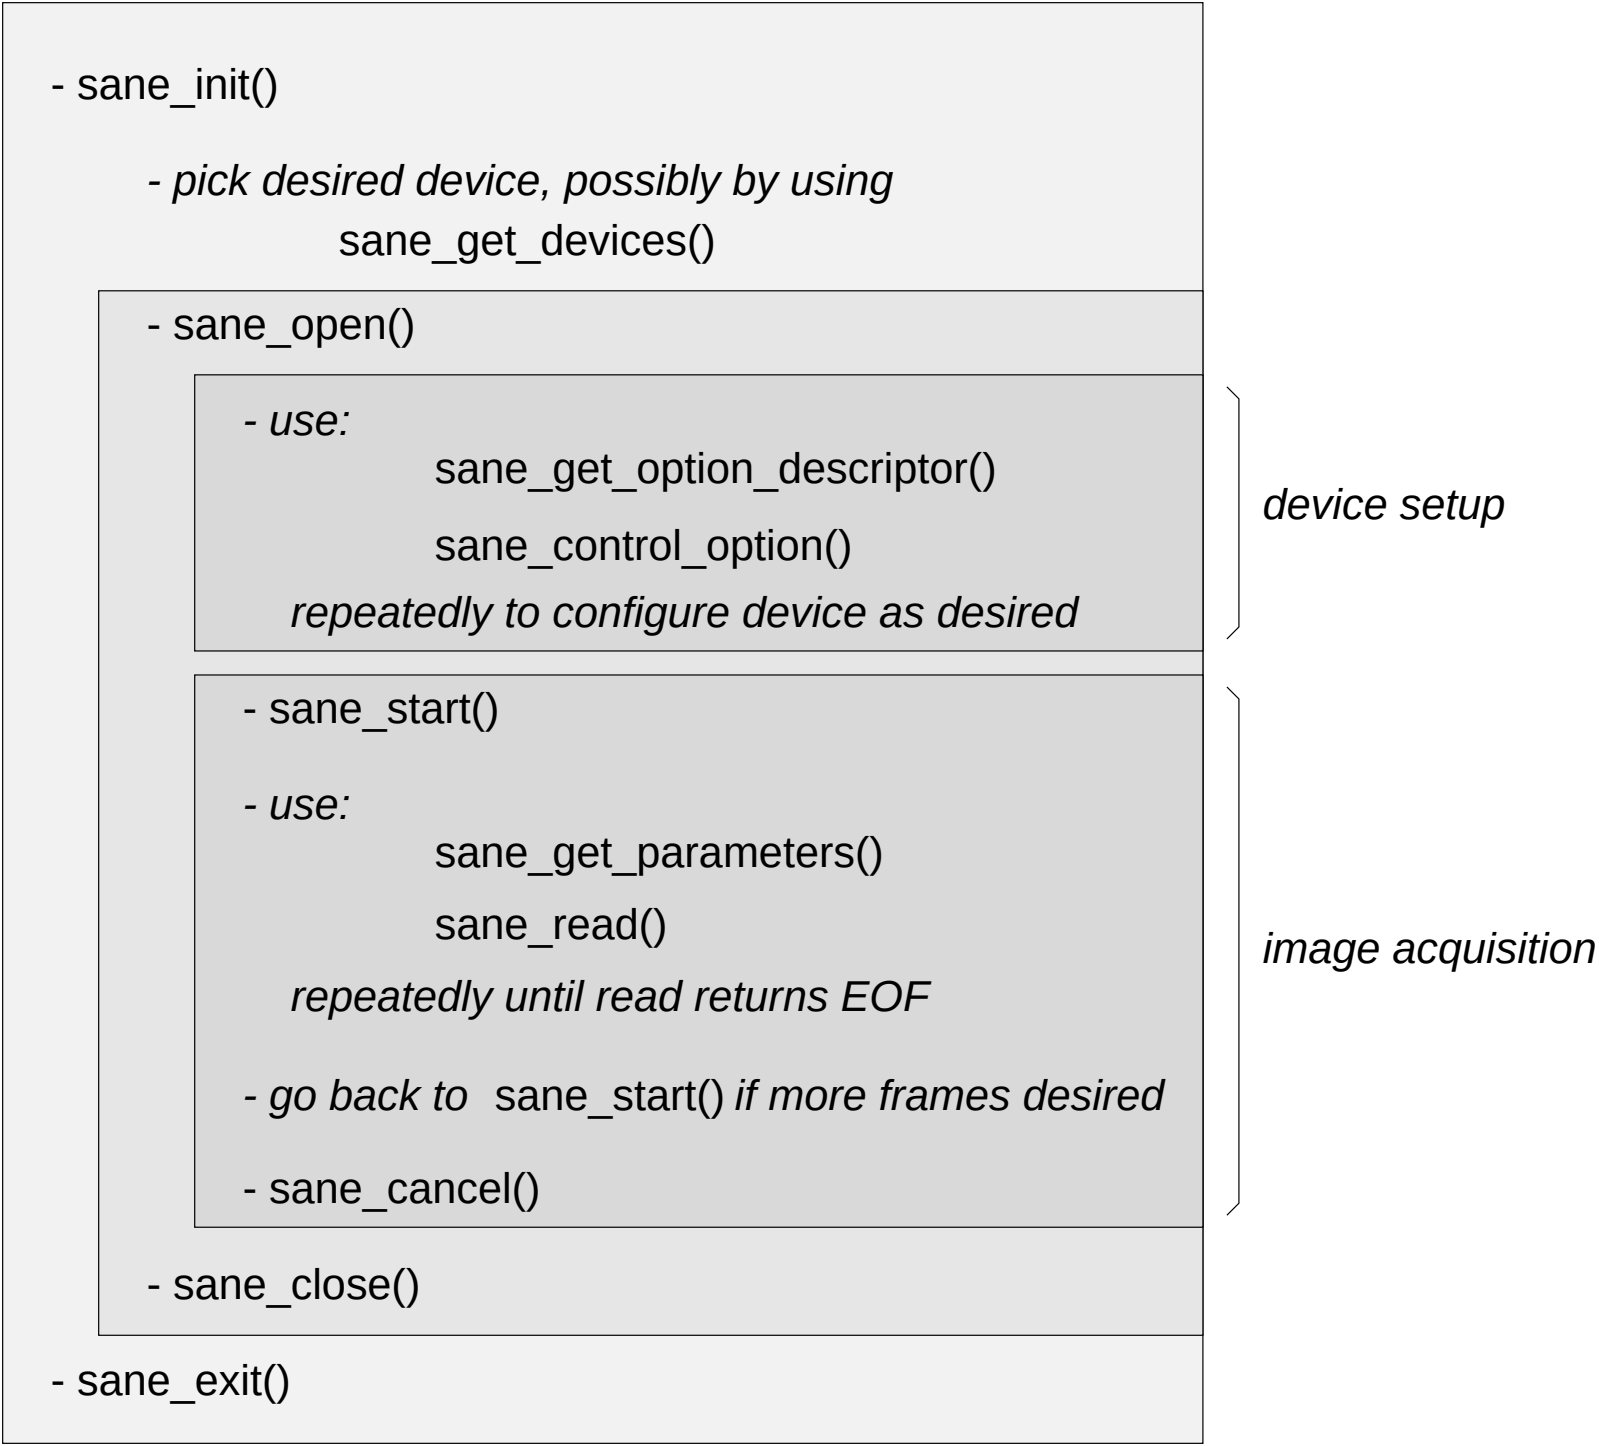
- sane_init()
- pick desired device, possibly by using
sane_get_devices()
- sane_open()
- use:
sane_get_option_descriptor()
sane_control_option()
repeatedly to configure device as desired
device setup
- sane_start()
- use:
sane_get_parameters()
sane_read()
repeatedly until read returns EOF
- go back to sane_start() if more frames desired
- sane_cancel()
image acquisition
- sane_close()
- sane_exit()